



Flow Deflector



A320 family

Reducing perceived noise levels on approach

Two specific tonal noise components generated by the Fuel Overpressure Protector Cavities are perceived on the ground at distances between 12 to 50 Km from the runway threshold. Extensive Flight Tests (FT) confirm that they can be significantly reduced by a simple upgrade.

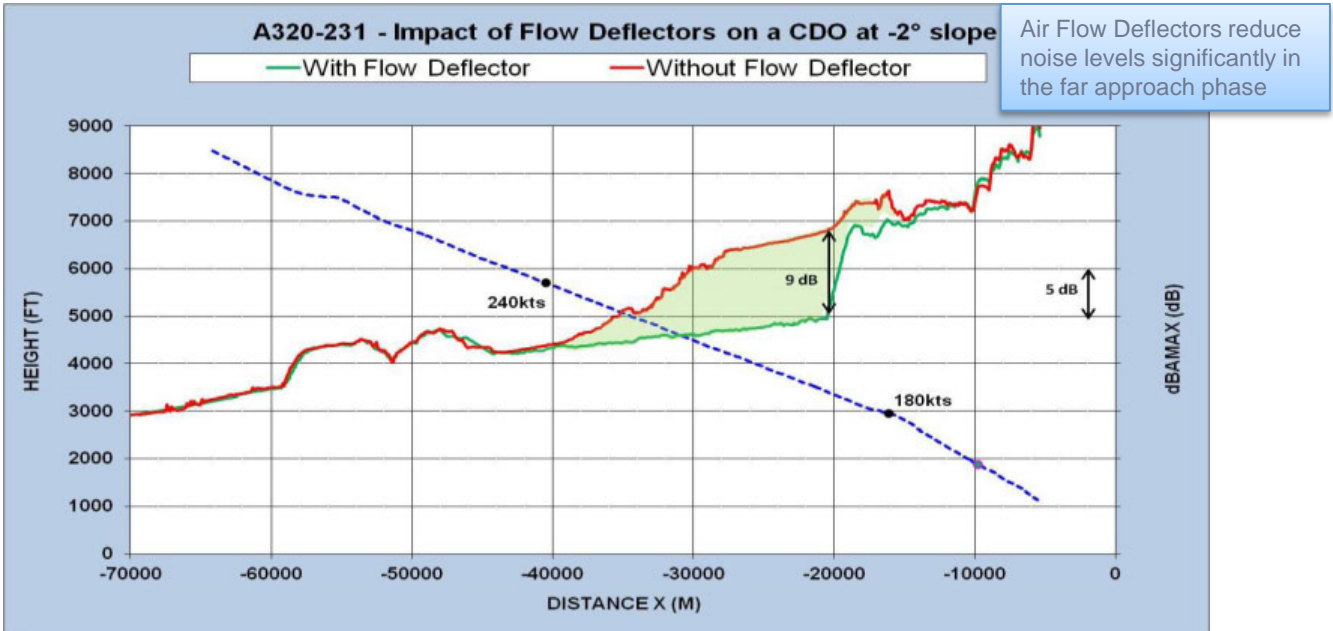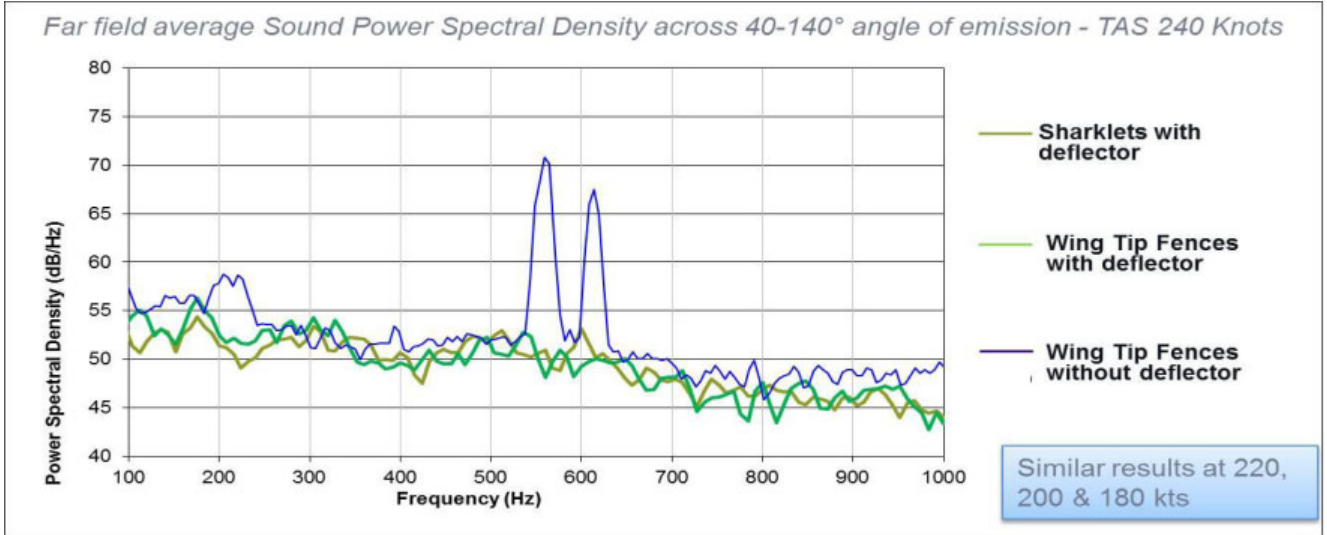

Retrofit Description

- Removal of Over Pressure Protectors
- Installation of 4 Air Flow Deflectors

MAN-HOURS 10 (order of magnitude not including aircraft de-fueling)

Weight impact 0.147Kg per aircraft

Availability From early 2014

For further information, please contact your Airbus commercial focal point
All data contained in this document are for information only

